

# DIVERTER VALVE DYDG


DYP&F have been designing and suppling rotary valves, diverter valves and other related components for the bulk soilds handling industry for more than 20 year.

## APPLICATION

- Suitable for powder and pellet products
- Using for feeding the bulk material to the pneumatic conveying system from the storage tank

## PRODUCT INFORMATION

- Heavy-Duty, casted body
- Flange Connections : ANSI 150# (Or DIN10/JIS 5k/10k available)
- Manual or pneumatic operation
- Easy and quick for cleaning and disassembly
- Indicator checks the orientation of rotor
- Maximum differential pressure up to 1bar(g)
- Temperature range : -20 °C to +80 °C

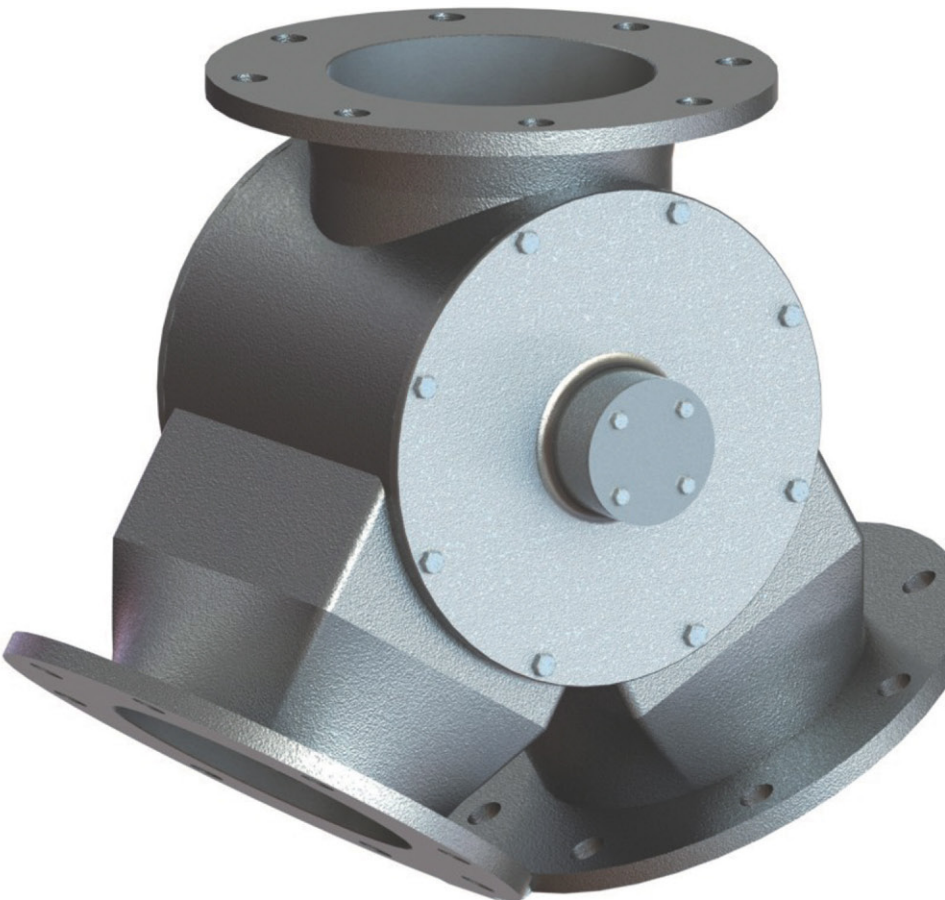


**DONGYANG P&F CO.,LTD**  
17th, 18th FL., IT Premier Tower 345-50, Gasan-dong,  
Geumcheon-gu, Seoul, Korea  
TEL : +82-2-2106-8000 FAX : +82-2-2106-8100

**DONGYANG P&F USA CORPORATION**  
29775 Hunter Road, Murrieta, Ca. 92653, U.S.A

**DONGYANG P&F CHINA CORPORATION**  
**(ZUOZHEN METALLIC EQUIPMENT)**  
809 Hongren B/D, Daguanglu, Nanjing, China





# DIVERTER VALVE DYDG

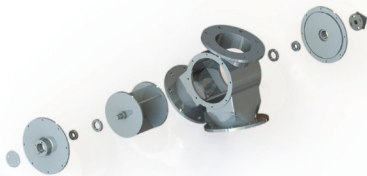



## OPTIONS & SPECIAL ORDER

- Internal polishing grade on request
- Shaft seal purge devices
- Body / Cover / Rotor material alter the other (SUS304/316/316L, or Aluminum)

## FLOW DIRECTION

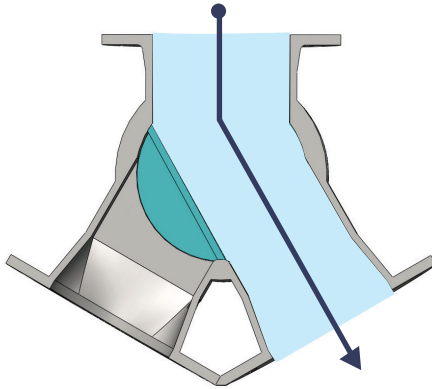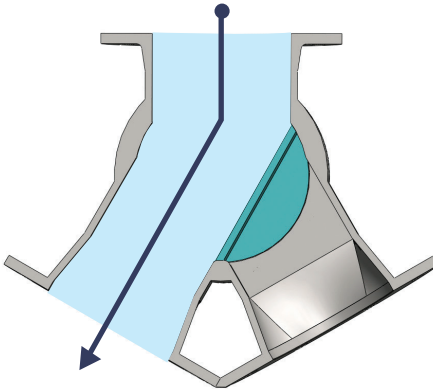

## DIMENSION OF DYDG

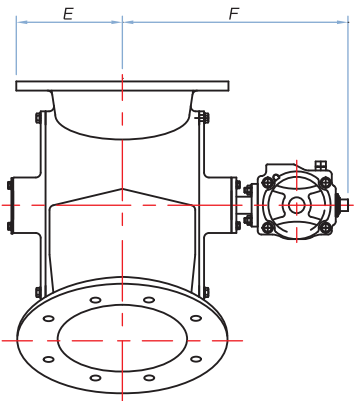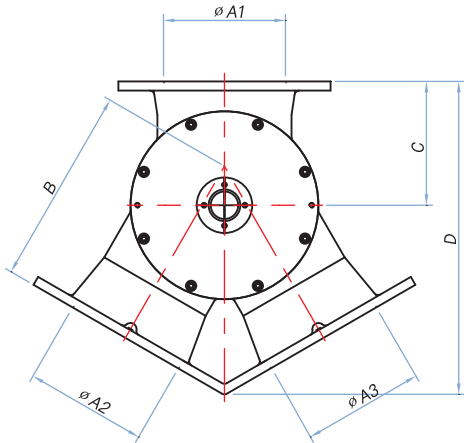

|          | ØA1   | ØA2   | ØA3   | B     | C     | D     | E     | F     |
|----------|-------|-------|-------|-------|-------|-------|-------|-------|
| DYDG-200 | 200mm | 200mm | 200mm | 325mm | 203mm | 513mm | 174mm | 370mm |
| DYDG-250 | 250mm | 250mm | 250mm | 380mm | 233mm | 595mm | 206mm | 392mm |
| DYDG-300 | 300mm | 300mm | 300mm | 450mm | 255mm | 685mm | 242mm | 455mm |
| DYDG-350 | 350mm | 350mm | 350mm | 510mm | 283mm | 770mm | 272mm | 486mm |
| DYDG-400 | 400mm | 400mm | 400mm | 563mm | 335mm | 870mm | 305mm | 553mm |